



# DIGITAL RADIUS GAGE (LOW ACCURACY)

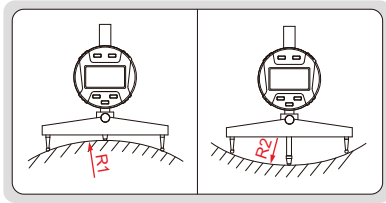


- Resolution: 0.01mm/0.001"
- Buttons: on/off, hold, mm/inch, s (select jaws), zero
- Measure radius of internal or external arcs
- Display can be rotated by 320°
- Supplied with 5 jaws for different sizes of arc
- Battery CR2032, automatic power off (time is adjustable)
- Data output
- Optional accessory: calibration standard (code **2183-BLOCK**), data output cable (code **7315-2183, 7302-2183**)

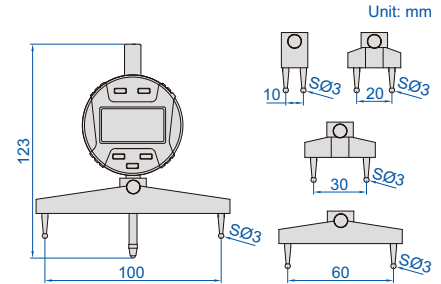

Code	Range of external radius (R1)	Range of internal radius (R2)	Accuracy (mm)
<b>2183</b>	5-910mm/0.2-35.83"	7-910mm/0.3-35.83"	±0.01R *

\* R is the radius to be measured. For example, radius is 100mm, the accuracy is  $\pm 0.01 \times 100 = \pm 1\text{mm}$

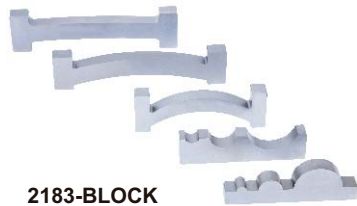

calibration standard application



## Calibration standard (optional)

Code	Remark
<b>2183-BLOCK</b>	includes 5 standard blocks