


Super-economical Type Digital Storage Oscilloscope

- SDS1000 Series



- + Bandwidth: 100MHz
- + 4-Channel
- + Sample rate: 1GS/s
- + Ultra-thin body
- + 7 inch high resolution LCD
- + SCPI, and LabVIEW supported

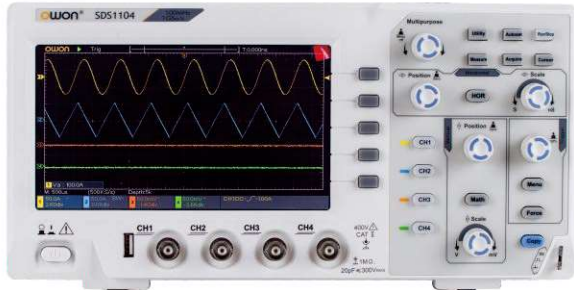

Model	SDS1104
Bandwidth	100MHz
Channel	4
Sample Rate	1GS/s
Horizontal Scale (s/div)	2ns/div - 1000s/div, step by 1 - 2 - 5
Display	7" color LCD, 800 x 480 pixels
Input Impedance	1MΩ ± 2%, in parallel with 20pF ± 15pF
Record Length	20K
Sample Rate / Relay Time	±100ppm
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)
Vertical Sensitivity	5mV/div - 5V/div (at input)
Trigger Type	Edge, Video
Automatic Measurement	Vpp, Vavg, RMS, Frequency, Period, Vmax, Vmin, Vtop, Vbase, Width, Overshoot, Pre-shoot, Rise time, Fall time, +Width, -Width, +Duty, -Duty, Delay A→B, Delay A→B, area, cycle area, FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF
Waveform Math	+, -, x, ÷, invert, FFT
Waveform Storage	16 waveforms
Communication Interface	USB host, USB device
Frequency Counter	available
Power Supply	100V - 240V AC, 50/60Hz, CAT II
Dimension (W x H x D)	301 x 152 x 70 mm
Device Weight	Approx. 1.10 kg

Specifications subject to change without prior notice.

+ Accessories

The accessories subject to final delivery.



Power Cord



CD Rom



Quick Guide



USB Cable



Probe



Probe Adjust



Soft Bag (optional)