


**TM-101**



**TM-102**

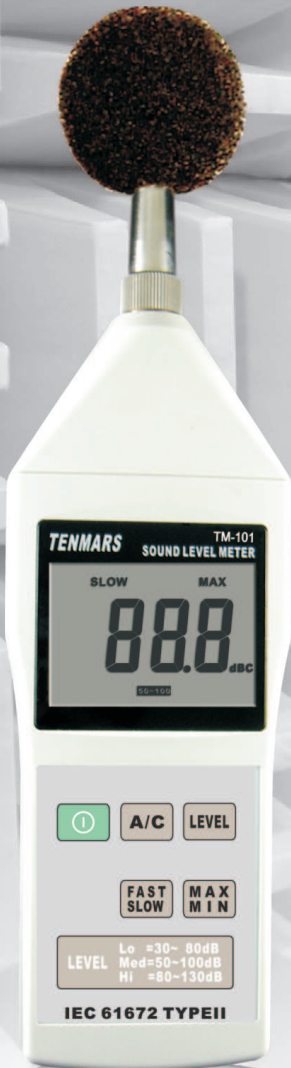

**TM-103**



**DISPLAY :**

- 3<sup>1</sup>/<sub>2</sub> digits LCD display with maximum reading of 2000.

**FEATURES :**

- Test range : 30~130dB.
- USB interface, 14,000 records data logger (TM-103).
- USB interface software for data download to Windows compatible PC.
- According to standard : EN61672 type 2.

**SPECIFICATIONS:**

Model	TM-101	TM-102	TM-103
Data hold	_____	✓	✓
Max/Min	✓	✓	✓
AC/DC Signal output	✓	_____	_____
USB interface	_____	_____	✓
Auto Ranging	_____	✓	✓
Auto power off	_____	✓	✓
Datalogger	_____	_____	✓
Backlit display	_____	✓	✓
Microphone	1/2 inch Electret condenser microphone		
Resolution	0.1dB	0.1dB	0.1dB
Accuracy	±1.5dB(ref 94dB@1KHz)	±1.5dB(ref 94dB@1KHz)	±1.5dB(ref 94dB@1KHz)
Level Range	LO : 30~80dB MED : 50~100dB HI : 80~130dB	LO : 30~80dB MED : 50~100dB HI : 80~130dB	LO : 30~80dB MED : 50~100dB HI : 80~130dB
Frequency Weighting	A,C	A,C	A,C
Time Weighting	FAST, SLOW	FAST, SLOW	FAST, SLOW
Dynamic Range	50dB	50dB	50dB
Frequency Range	31.5Hz~8KHz	31.5Hz~8KHz	31.5Hz~8KHz
Size(LXWXH)	280x56x32mm	280x56x32mm	280x56x32mm
Weight(including battery)	300g	290g	290g